



Heatex

WATER HEATER *pro*



Engineered for Reliability

01

Extreme Heat Resilience

Designed to perform in 50°C+ ambient temperatures. Unlike imported units built for temperate climates, Heatex Pro maintains consistent output year-round.

02

Hard Water Protection

Duraglass-coated tank and magnesium anode system combat high-mineral GCC water. Extends lifespan where standard heaters fail within months.

03

Voltage Stability

Engineered for UAE power standards (220-240V).

04

Rapid Recovery

High-wattage heating elements deliver fast recovery times — essential for UAE's multiple-shower households and commercial demands.





VERTICAL WALL MOUNT


Capacity (Litres)	Height (mm)	Diameter (mm)	Voltage (Volt)	Standard Power (KW)*	Maximum Working Temp (°C)	Maximum Working Pressure Bar
30	495	390	220-240V	1.2	70-85	8
50	560	440	220-240V	1.2	70-85	8
80	800	440	220-240V	1.2/1.5	70-85	8
100	970	440	220-240V	1.5	70-85	8

Dimensions (mm)

Capacity (Litres)	A	B	C	D	E	F	G
30	475	495	345	390	150	425	270
50	540	560	385	440	150	475	270
80	780	800	665	440	150	475	270
100	950	970	785	440	150	475	270

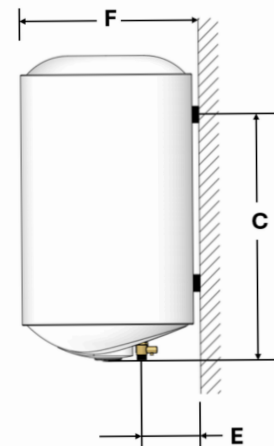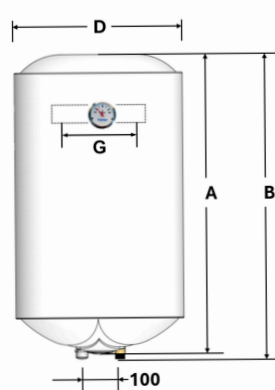

INSIDE VIEW

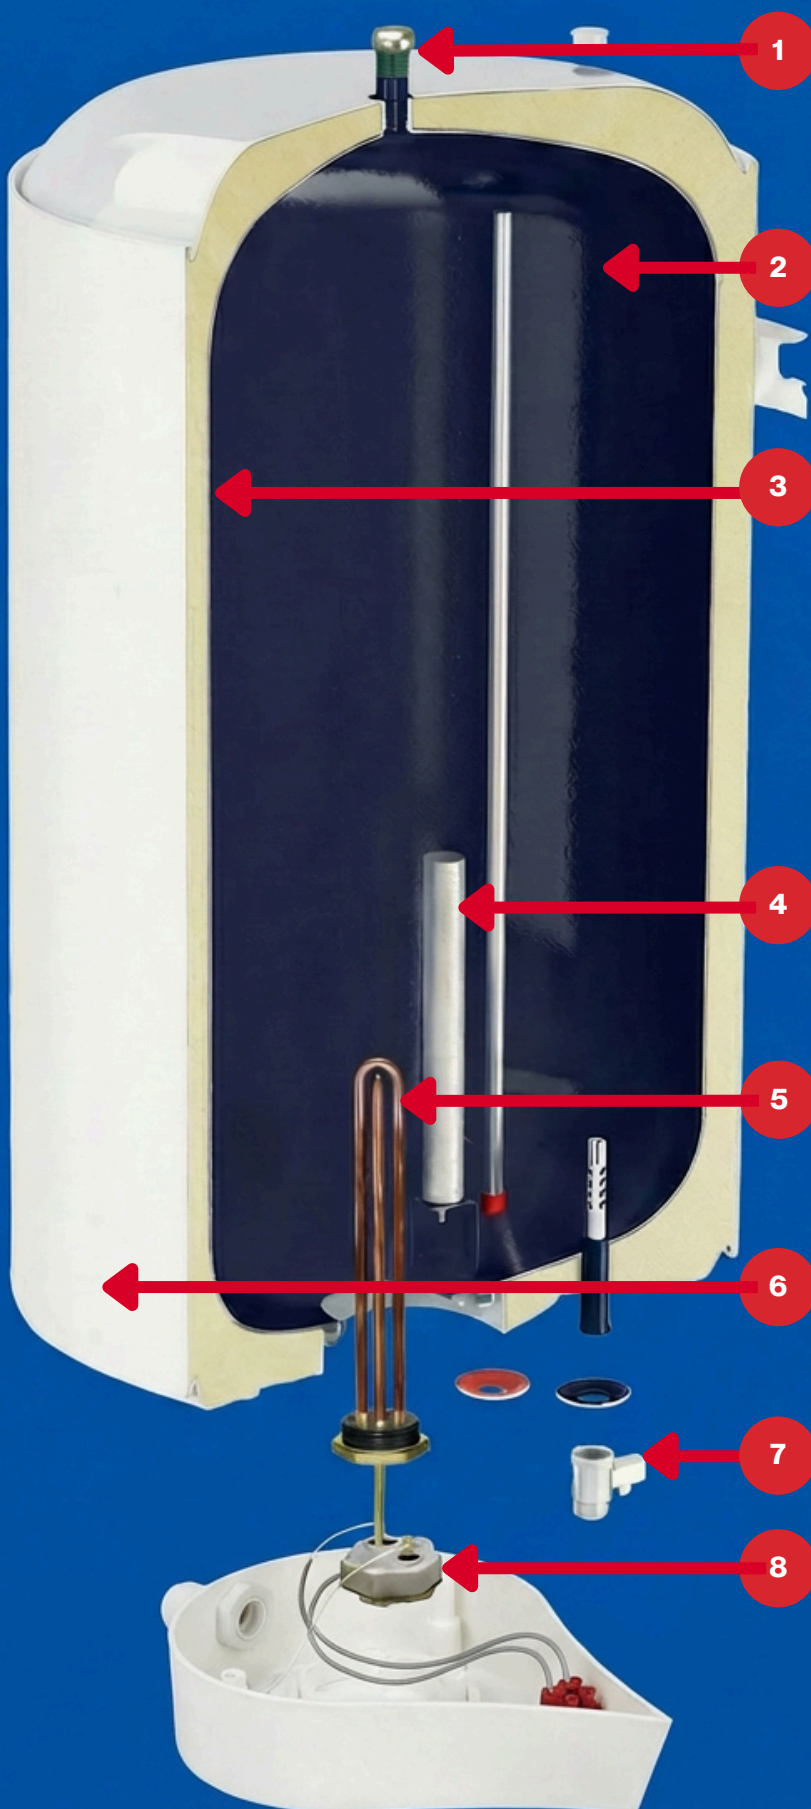

1 Secondary Safety Valve (Optional for SASO):

An additional safety valve is installed at the top of the unit to give added protection against increased pressure levels in the storage tank.

2 Storage Tank: The steel tank interior has a Duraglass coating which guarantees protection against corrosive & fungi formatting agents.

3 Polyurethane Foam: The dense honey comb structure of the polyurethane foam helps to retain heat for an extended period of time, thus consumption.

4 Magnesium Anode: Prevents electrolytic corrosion, which in turn gives the tank a longer life.

5 Heating Element: The immersion type heating element is constructed from Nickel-Chromium the whole being encased in a copper tube & sealed against moisture

6 Outer Body: A Metal outer shell coated with a baked

7 Safety Valve: It has dual functions of non return valve & pressure release.


8 Thermostat: An adjustable thermostat disconnects the water heater from electric supply in the event of water exceeding a pre-set temperature. A lasting protection against corrosion.



HORIZONTAL WALL/CEILING MOUNT

Capacity (Litres)	Height (mm)	Diameter (mm)	Voltage (Volt)	Standard Power (KW)*	Maximum Working Temp (°C)	Maximum Working Pressure Bar
30	475	390	220-240V	1.2	70-85	8
50	540	440	220-240V	1.2	70-85	8
80	780	440	220-240V	1.2/1.5	70-85	8
100	950	440	220-240V	1.5	70-85	8



Capacity (Litres)	Dimensions (mm)							
	A	B	C	D	E	F	G	H
30	475	410	265	390	215	410	270	170
50	540	465	405	440	240	460	270	170
80	780	465	405	440	240	460	290	255
100	950	465	405	440	240	460	290	325

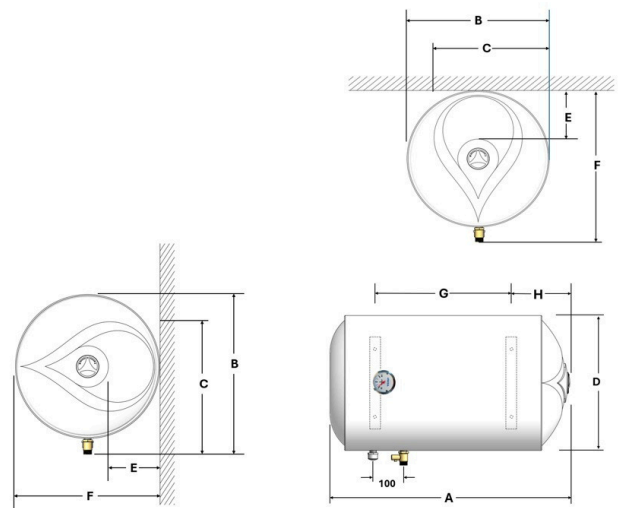



15 & 30 Litres




Capacity (Litres)	A (mm)	B (mm)	C (mm)	Voltage (Volt)	D (mm)	E (mm)	F (mm)	Standard Power (KW)
15	400	400	310	220-240V	300	125	70	1.2
30	445	445	410	220-240V	350	160	85	1.2

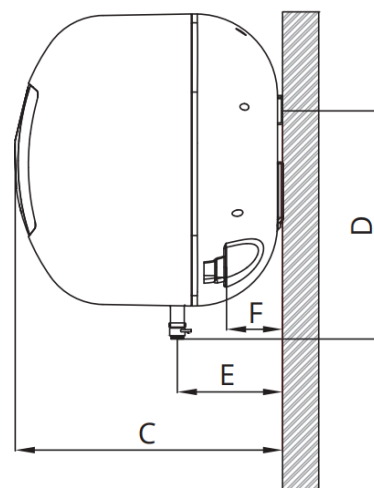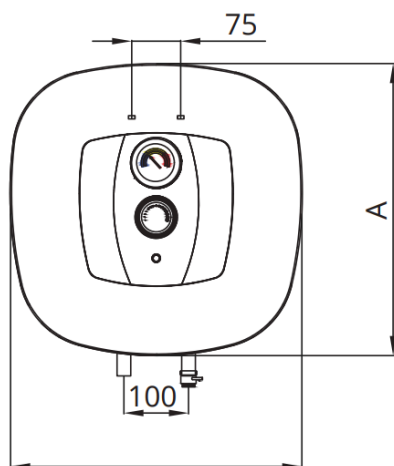





Thermosyphonic Solar Water Heater

Model	Tank Capacity (L)	A Width (mm)	B Length (mm)	H Height (mm)	Panel Combinations	Electrical Backup (W)	C Diameter (mm)
HP150S	150	1300	2700	980	1 x 2 m ²	3000	440
HP200S	200	1000	2700	1100	1 x 2 m ²	3000	620
HP300S	300	1450	2700	1100	2 x 2 m ²	3000	620
HP300S-01	300	1450	2900	1100	1 x 2.7 m ²	3000	620

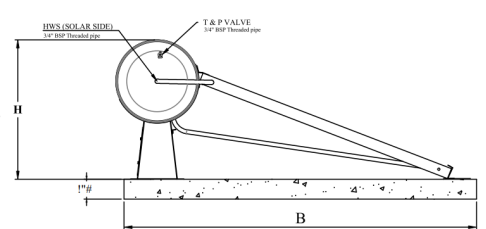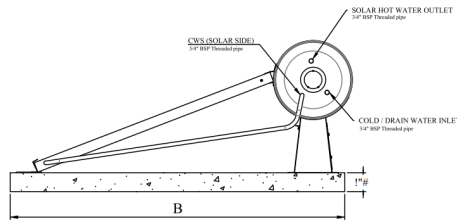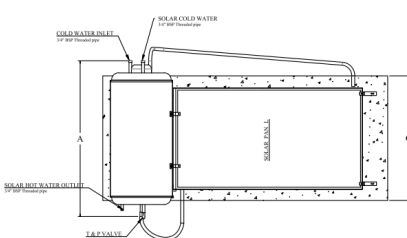

Model	Tank Capacity (L)	A Width (mm)	B Length (mm)	H Height (mm)	Panels Length (mm)	Panel's Width (mm)
HP150S	150	2750	1300	150	1980	1010
HP200S	200	2750	1300	150	1980	1010
HP300S	300	2750	2800	150	1980	1010
HP 300S-01	300	2750	1300	150	2160	1260

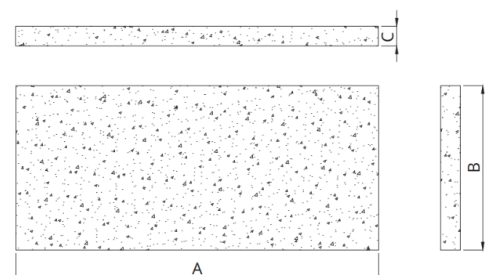



INTERNATIONAL TECHNICAL STANDARDS



STAR INDUSTRIAL PRODUCTS L.L.C.
P.O. BOX: 2891, AJMAN, UNITED ARAB EMIRATES
TELEPHONE: +971 6 743 4389
FAX: +971 6 743 8085
E-MAIL: INFO@HEATEXWATERHEATER.COM